
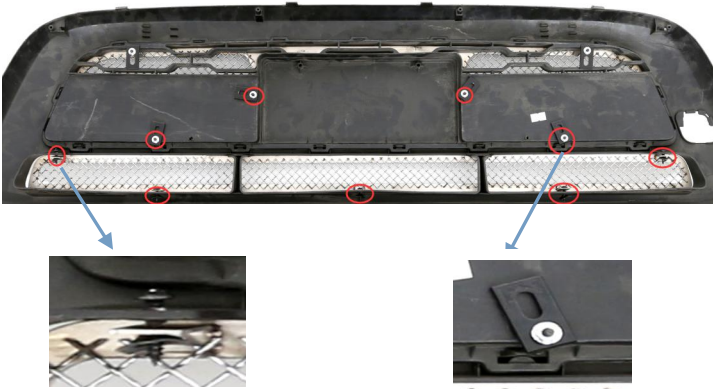



Part#	GR11GEI62T	Application	2012-2013 Kia SOUL Lower Bumper					
-------	-------------------	-------------	--	--	--	--	--	--

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	2	Stainless steel	4	Flat Tab	6	
	2	U-Clip Nuts	5		5	stud	6	6-32×1 1/2"
	3	Screws	5	8#-3/4"	6	Lock Nut	6	6-32

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	You may need to remove the black plastic cover (at the bottom of OEM front bumper) from vehicle. This will allow access to the rear of the grille shell.	
3	Center the grille into the opening of the factory grille shell. Be sure the Screws are through the hole . You need mark and drill nine holes at the around.	
4	Fixedly mounted the Screws and U-Clip Nuts around the car. Make sure the grille is centered and tighten the fasteners.	<p>Note: You need to mark and drill holes in the red mark</p>  <p>Screws & U-Clip Nuts Flat Tab & stud & Lock Nut</p>
5	Reinstall the black plastic cover which was removed in step 2.	N/A
6	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!